

TOPKIT MC 265

LIZ 1

POTAIN TP®




TÜV Cert
POTAIN ISO 9001 POT
LLOYD'S RQA

Mâts - Maste - Masts - Mástil - Torre



2 m

Flèche - Ausleger - Jib
Flecha - Braccio
40m → 65m






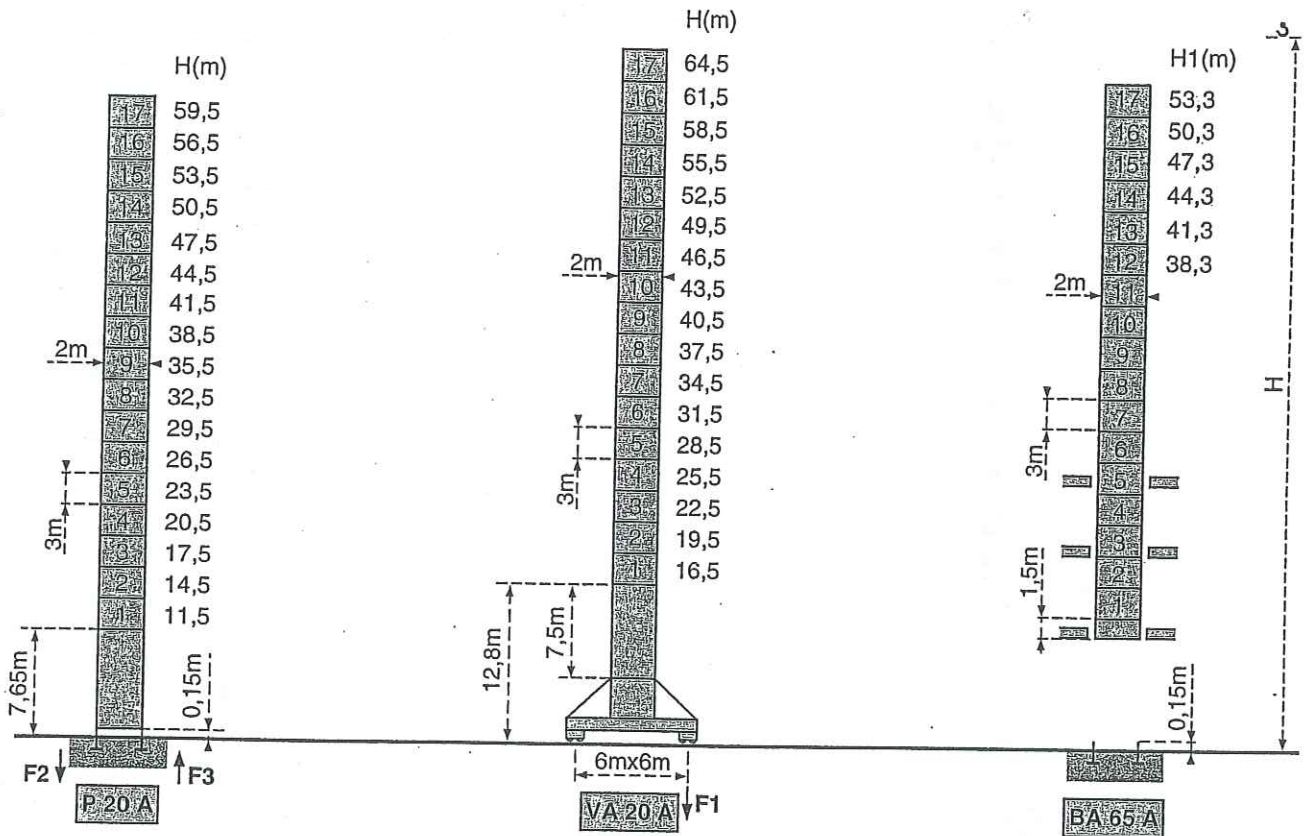


Voir ci-contre
Siehe nebenstehend
See opposite
Ver página opuesta
Vista pagina accanto

F = Réactions - Eckdrücke - Reactions - Reacciones - Reazioni


Flèche
Ausleger
Jib
Flecha
Braccio

Courbes de charges - Lastkurven - Load diagrams - Curvas de cargas - Curve di carico

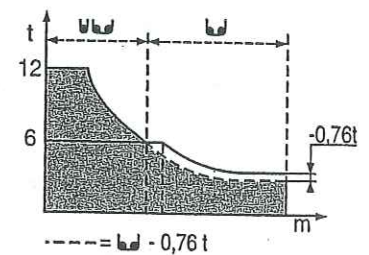


Télescopage sur dalles - Kletterkrane im Gebäude - Climbing crane
Telescopage gruas trepadoras - Gru in cavedio

BA 65 A

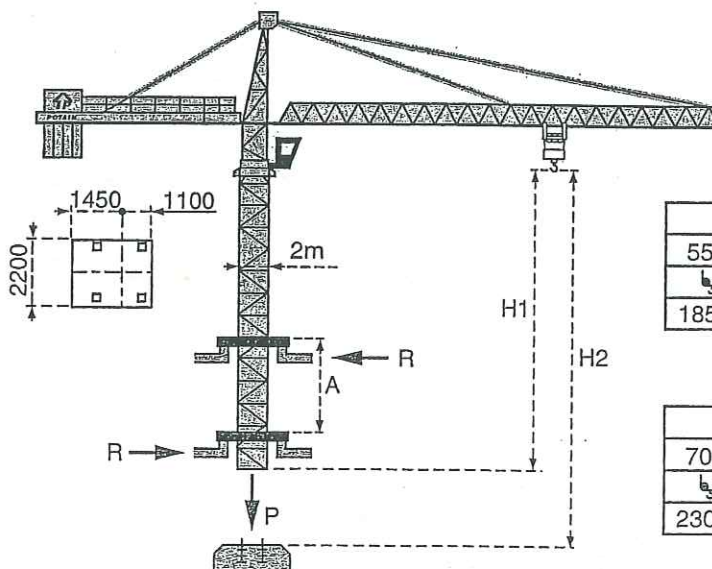

H2	
55 RCS 30D	
185 m	92 m

H2	
70 RCS 30D	
230 m	115 m

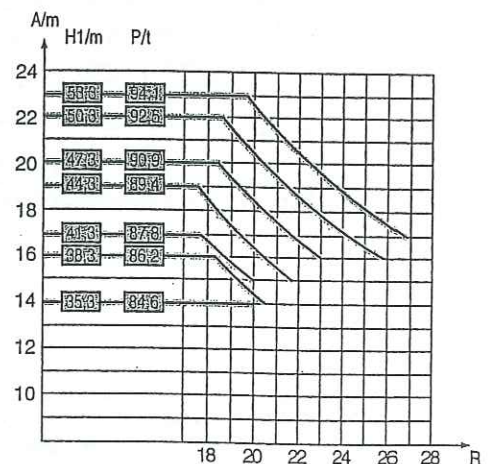

A Distance entre cadres
H1 Hauteur grue
P Poids de la grue (en service)
R Réaction horizontale




A Abstand zwischen den Rahmen
H1 Kranhöhe
P Krangewicht (in Betrieb)
R Horizontalkräfte



A Distance between collars
H1 Crane height
P Crane weight (in service)
R Horizontal reaction



A Distancia entre marcos
H1 Altura grúa
P Peso de la grúa (en servicio)
R Reaccion horizontal


A Distanza fra i telai
H1 Altezza gru
P Peso della gru (in servizio)
R Reazione orizzontale

Mécanismes - Antriebe - Mechanisms - Mecanismos - Meccanismi

			m/min	t	m/min	t		ch -PS hp	kW
Levage Heben Hoisting Elevación Sollevamento			55		70		370m >370m*	55 70	40,5 51
			RCS		RCS				
			30D		30D				
			0 → 34	6	0 → 17	12			
0 → 68	3	0 → 34	6						
0 → 40	6	0 → 20	12						
0 → 80	3	0 → 40	6						

Dtribution Katzfahren Trolleying Distribución Ditrribuzione			6 D3 V4		0 → 40 → 80		6	4,4
---	---	---	---------	--	-------------	--	---	-----

Orientation Schwenken Slewing Orientación Rotazione			RCV 185		0 → 0,8 t/min 10m		2x8	2x5,2
---	--	--	---------	--	-------------------------	--	-----	-------

Translation Kranfahren Travelling Traslación Traslazione		RT 544 A1 2V		3,5 - 27		4x7	4x5,2
--	---	--------------	--	----------	--	-----	-------

Réseau - Netzstrom - Mains supply - Red - Rete elettrica	CEI 38 IEC 38	400V(+6%-10%) 50 Hz
Puissance électrique nécessaire - Anschlusswert - Necessary electric power Potencia eléctrica necesaria - Potenza elettrica necessaria	55 RCS : 80 KVA 70 RCS : 105 KVA	
Groupe électrogène - Stromaggregat - Generator set - Grupo electrogeno - Gruppo elettrogeno	*	

*Nous consulter - Auf Anfrage - Consult us - Consultarnos - Consultateci

Conforme aux directives CEE 84/534 et 87/405 sur le niveau acoustique - Gemäss EWG-Richtlinien 84/534 und 87/405 für den Schall- Leistungspegel
 In compliance with the EEC 84/534 and 87/405 Instructions on noise level - Conforme con las directivas CEE 84/534 y 87/405 sobre el nivel acustico
 Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico

NF E 52081 - 82

Copyright.Reproduction interdite © POTAIN 1995



18.Rue de Charbonnières, B.P. 173-F 69132 ECULLY Cedex
 Tél. 72.20.20.20 - Télex 375 213 - Fax 72.20.20.00

POTAIN GmbH Deutschland Tel: 06.105.704.0
 POTAIN U.K. Great Britain Tel: 0895.44.52.61
 Simma POTAIN Italia Tel: 02.97.96.71
 POTAIN Portugal Portugal Tel: 02.968.08.89

TOPKIT MC 265

Réf. 1995.20 LIZ 1

Modifications réservées - Änderungen vorbehalten - Subject to modification - Modifiche riservate
 Printed in France - Réalisation SODIPE